



XIAMEN YITAI INDUSTRIAL CO.,LTD



Since **1996**

5000 Square Meters Workshop



4000 Machines Annual Output

30 Office Stuff, **30** Technicians, **80** Workers

80 Countries Have YITAI Machines Running

7 Oversea Sales Branches
India, Bangladesh, Indonesia, Mexico, Argentina, Colombia, Peru

More Agents Wanted...

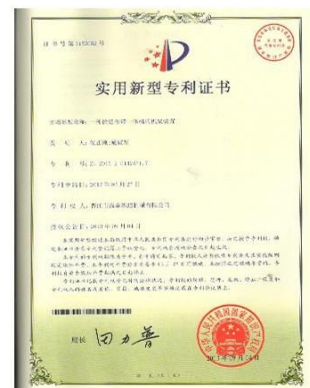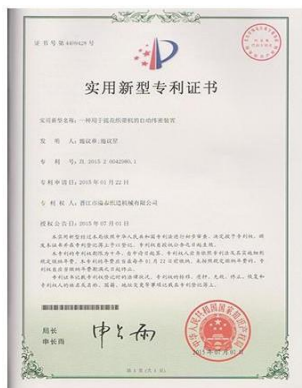

YTW-C Crochet Knitting Machine

Crochet machine models: YTW-C 609/B3, YTW-C 825/B3, YTW-C 609/B8, YTW-C 609/B12.

Each model differences: 609 series means machine operation width is 609mm, 825 series means machine operation width is 825mm; YTW-CP electronic crochet machine.

Stanrad machine is with 200 pcs back creels and 4 pcs beam stand, with rubber feeder, max width can produce 55mm.

Optional attachment can add electrical rubber feeder and widen device; with standard widen device max width can produce 300mm, with a special widen device max width can produce 450mm.

YTW-C Series Specification

Model	609/825 B3	609/825 B8	609/825 B12
Operating Width	609/825mm		
Gauge Per Inch	15, 20		
Weft bars	3 bars	8 bars	11 bars
Density	5-25/cm		
Link chain extension	12(Normal) 12-50(Longer)	12-48	12-120
Motor	1.5HP		
Speed	1200-1400 RPM		
Normal attachment	Rubber feeder, Finished product collecting roller on both side, Creel, Beam holder		
Optional attachment	Beam, Adjustable positive feeder for warp threads, Device for loose wefts effect on two edges.		
Back Yarn Creel Ends	200 Ends(100 Ends Left and 100 Ends Right)		
Back Beam Creel Ends	4		
Density	5-25/CM		



- Production of elastic and non-elastic flat tapes, medical bandages, knitting elastic tapes and other tape types.

YTW-C 609/B8 Crochet knitting machine

Standard machine B8

Machine with widen device B3


Normal rubber feeder



Electric rubber feeder



Scan to check machine running videos



B3 model samples

Produce plain elastic and non-elastic tapes



B8 and B12 samples



YTW-CP series computerized crochet knitting machines

Normal crochet machine max 120 circles.

Computerized crochet machine:


1. max can reach 1000 circles
2. easy to make designs, input to the software directly
3. easier to operate
4. high efficiency for sample making
5. can make more complex and various designs



YTW-CP Computerized crochet knitting machine

YTW-CP Series Specification

Model	609/825 B8	609/825 B16
Operating Width	609/825mm	
Gauge Per Inch	15, 20	
Wefl bars	8 bars	16 bars
Density	5-25/cm	
Link chain extension	No limited	
Motor	1.5HP	
Speed	1200-1400 RPM	
Normal attachment	Rubber feeder, Finished product collecting roller on both side, Creel, Beam holder	
Optional attachment	Beam, Adjustable positive feeder for warp threads, Device for loose wefts effect on two edges.	
Back Yarn Creel Ends	200 Ends(100 Ends Left and 100 Ends Right)	
Back Beam Creel Ends	4	
Density	5-25/CM	




YTW-CP/609/B8 B16 Computerized crochet knitting machine



YTW-CP 609/B8

Samples made by computerized crochet knitting machine

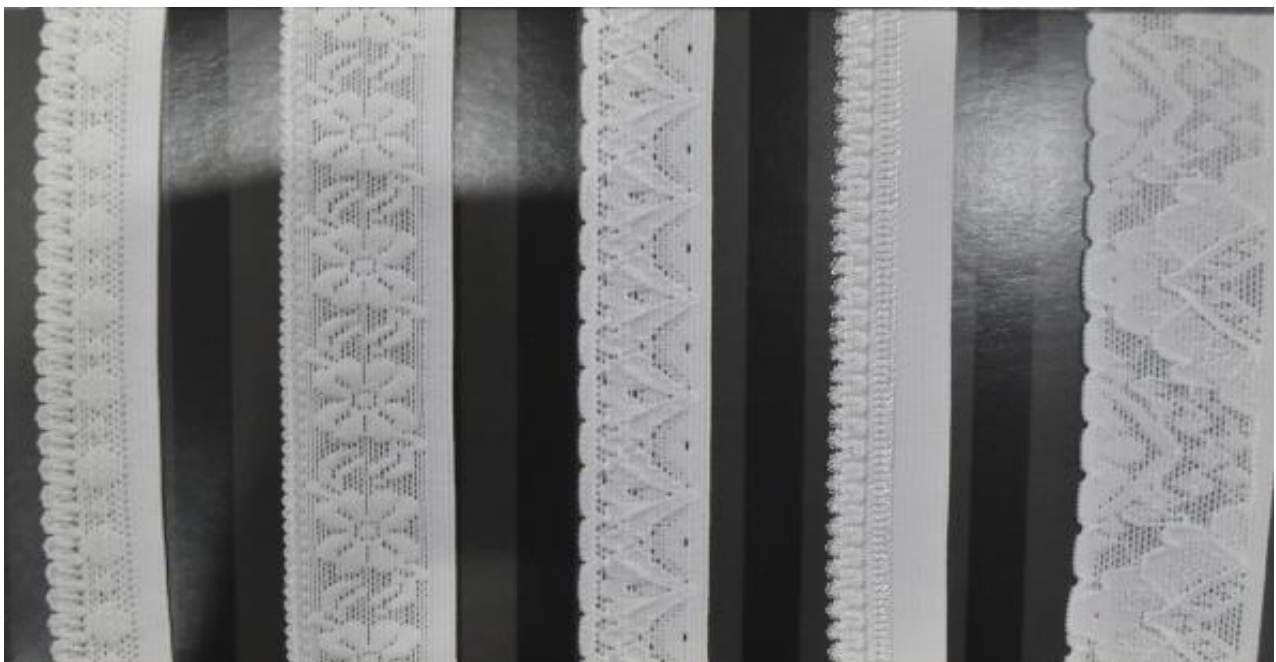

Machine features

1. Core part: needle bed, needle board, needle holder (originally from Taiwan)
2. Bearing: Japan
3. Rubber roller: there's no space between two rubber rollers, guarantee the tape tension.
4. Special material carbon fiber for the belt come-out roller, light, straight and anti- abrasion, ensures the final product beautiful.
5. Transmit system using belt and synchronized wheel, higher speed can reach 1400RPM, more stable, lower noise.
6. Gauze: 15, 20
7. Standard machine operation width is 600mm, each tape max width can be 55mm.
With a widen device max. tape width can be 350mm. With standard back creel places 200.

Thank you for your time